




DIMENSIONS



Accessories



OPTIONAL MOUNTING
ACCESSORY

PRODUCT

Name	TWIST UL SPOT 3000K WT
Reference	U2041211WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 6-10,5W 250mA
Reference	U1000120

LIGHT SOURCE

Type	LED
Gross luminous flux	1057 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	8.4 W
Current	250 mA
Efficacy	126 Lm/W
LED lifespan	L90B10>55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Delivered luminous flux	972 Lm
Light beam angle	19°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	9.8 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V


OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.



DIMENSIONS



Accessories



OPTIONAL MOUNTING
ACCESSORY


Recess measurements	4.7 x 4.7 in 119 x 119 mm
Weight	0.96 lb 435 gr
Packaged weight	1.33 lb 604 gr
Packaging dimensions	6.57x6.06x6.06 in 167x154x154 mm
Materials	Aluminium

OTHER DATA



Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.

Mandatory / Not Included

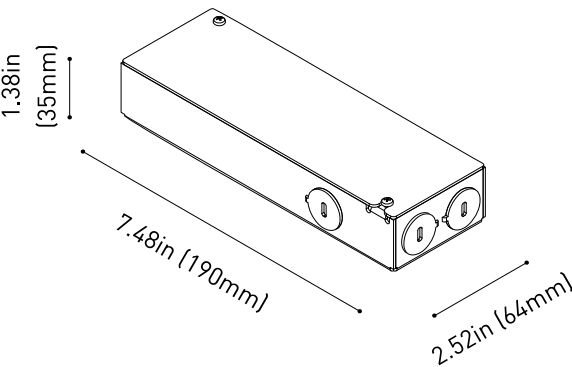


PRODUCT	
Model	REMOTE BOX 6-10,5W 250mA
Driver	Included: EVERLINE - Value series or similar
Reference	U1000120
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 2.52 x 1.38 in 190 x 64 x 35 mm
Weight	1.38 lb 625 gr
Packaged weight	1.5 lb 680 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	18 AWG - 447 ft (350 mA) / 224 ft (700 mA)
	16 AWG - 711 ft (350 mA) / 356 ft (700 mA)
	14 AWG - 1132 ft (350 mA) / 566 ft (700 mA)

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz


OUTPUT CHARACTERISTICS	
Output Voltage	24 - 42 V
Output Current	250 mA
Output Power	6 - 10.5 W



POLAR DIAGRAM

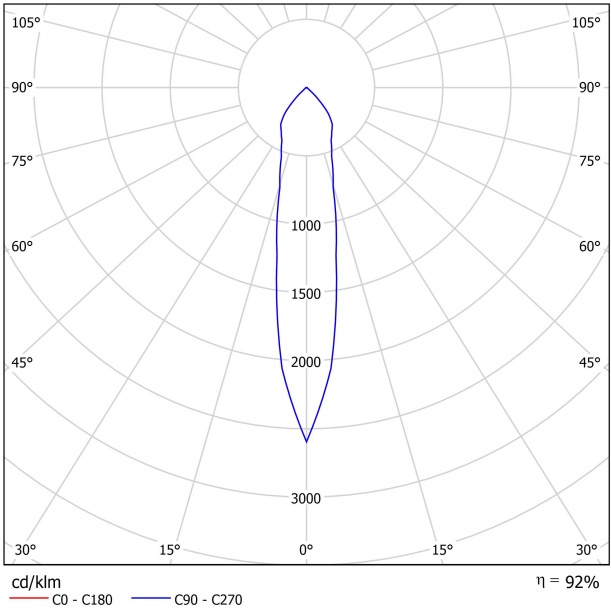


CONICAL DIAGRAM

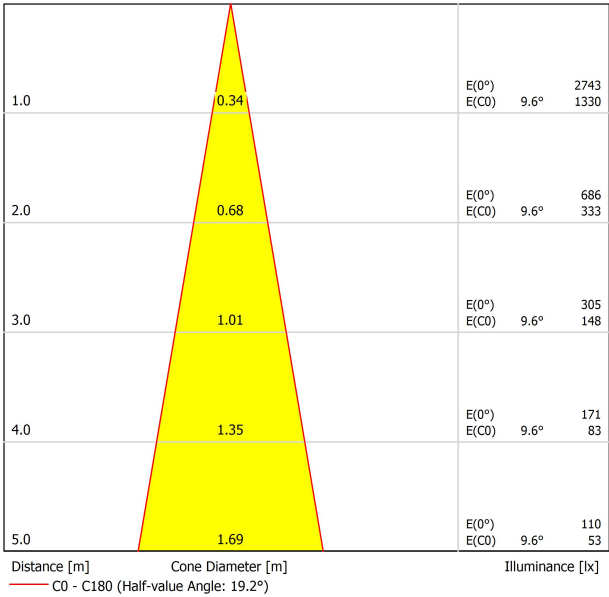

New construction Plaster Frame L

ARKOSLIGHT

Optional mounting accessory

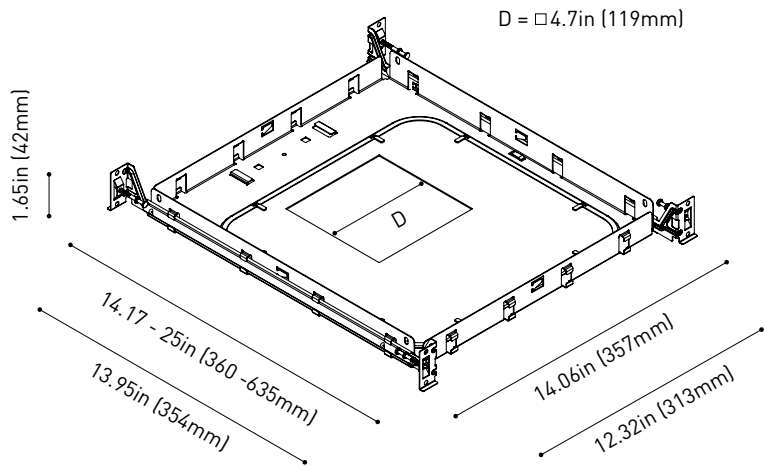

PRODUCT	
Model	NC PLASTER FRAME L 119x119
Reference	U100-01-21
Category	Optional Mounting Accessory
IC Rated	Yes
Weight	2.57 lb 1166 g
Packaged Weight	4.01 lb 1821 g
Packaging Dimensions	16.6x15.03x3.15 in 422x382x80 mm
TO BE USED WITH REMOTE BOX	