




DIMENSIONS



Accessories



OPTIONAL MOUNTING
ACCESSORY

PRODUCT

Name	TWIST UL FLOOD 4000K NT
Reference	U2041222NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 6-10,5W 250mA
Reference	U1000120

LIGHT SOURCE

Type	LED
Gross luminous flux	1073 Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	8.4 W
Current	250 mA
Efficacy	128 Lm/W
LED lifespan	L90B10>55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	86%
Delivered luminous flux	923 Lm
Light beam angle	40

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	9.8 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V


OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.



DIMENSIONS



Accessories




Recess measurements	4.7 x 4.7 in 119 x 119 mm
Weight	0.96 lb 435 gr
Packaged weight	1.33 lb 604 gr
Packaging dimensions	6.57x6.06x6.06 in 167x154x154 mm
Materials	Aluminium

OTHER DATA



Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.

Mandatory / Not Included

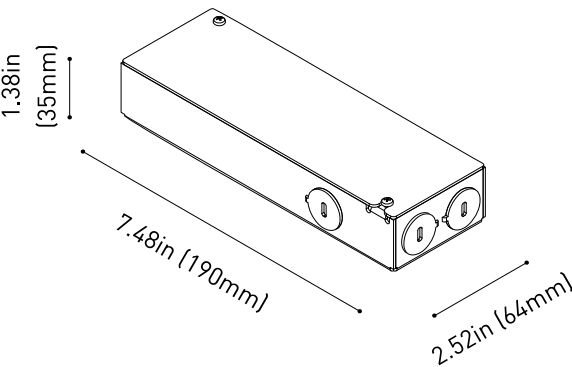


PRODUCT	
Model	REMOTE BOX 6-10,5W 250mA
Driver	Included: EVERLINE - Value series or similar
Reference	U1000120
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 2.52 x 1.38 in 190 x 64 x 35 mm
Weight	1.38 lb 625 gr
Packaged weight	1.5 lb 680 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	18 AWG - 447 ft (350 mA) / 224 ft (700 mA)
	16 AWG - 711 ft (350 mA) / 356 ft (700 mA)
	14 AWG - 1132 ft (350 mA) / 566 ft (700 mA)

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz


OUTPUT CHARACTERISTICS	
Output Voltage	24 - 42 V
Output Current	250 mA
Output Power	6 - 10.5 W



POLAR DIAGRAM

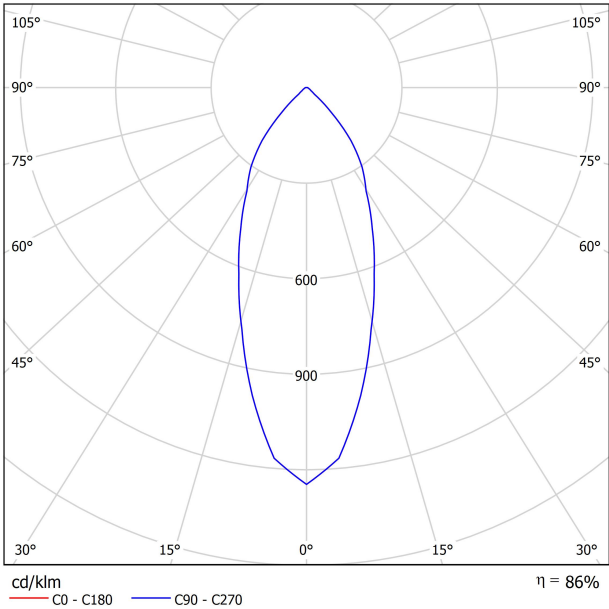


CONICAL DIAGRAM

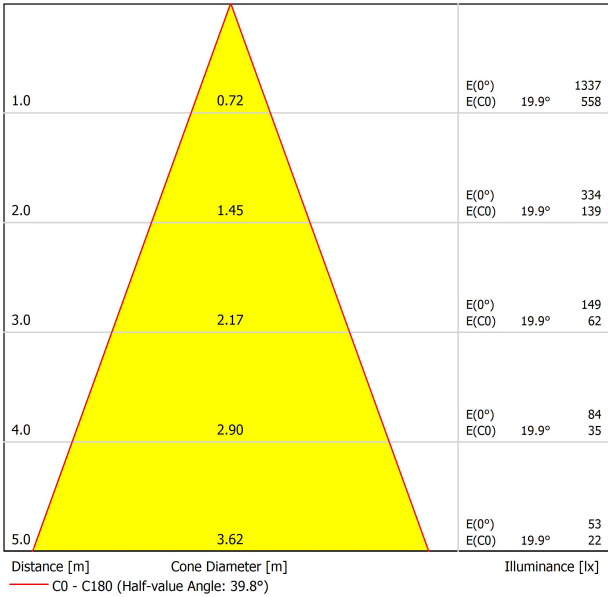

New construction Plaster Frame L

ARKOSLIGHT

Optional mounting accessory

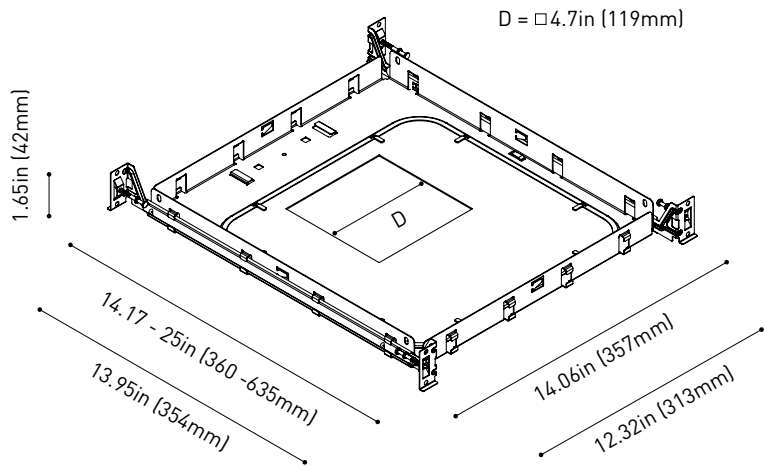

PRODUCT	
Model	NC PLASTER FRAME L 119x119
Reference	U100-01-21
Category	Optional Mounting Accessory
IC Rated	Yes
Weight	2.57 lb 1166 g
Packaged Weight	4.01 lb 1821 g
Packaging Dimensions	16.6x15.03x3.15 in 422x382x80 mm
TO BE USED WITH REMOTE BOX	