




## DIMENSIONS

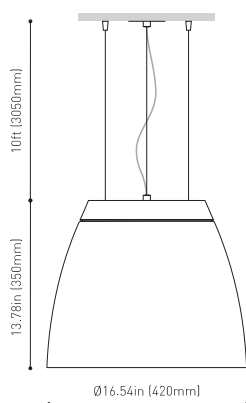

## PRODUCT

|           |                    |
|-----------|--------------------|
| Name      | SALT 2 UL 3000K NG |
| Reference | U2200211NG         |
| Color     | Black-Gold         |
| RAL       | 9005 & 1036        |
| Category  | SUSPENSION         |

## LIGHT SOURCE

|                       |                |
|-----------------------|----------------|
| Type                  | LED            |
| Gross luminous flux   | 5125 Lm        |
| Color temperature     | 3000 K         |
| Chromatic stability   | MacAdam Step 2 |
| Color Rendering Index | CRI>90         |
| Power                 | 35 W           |
| Current               | 900 mA         |
| Efficacy              | 146 Lm/W       |
| LED lifespan          | L80B10>60.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                         |         |
|-------------------------|---------|
| Lighting efficiency     | 66%     |
| Delivered luminous flux | 3383 Lm |
| Light beam angle        | 77°     |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                            |                                        |
|----------------------------|----------------------------------------|
| Driver                     | Included: ERP-PSB series or similar    |
| Power values of the system | 38 W                                   |
| Frequency                  | 50/60 Hz                               |
| Dimming                    | 0-10V / TRIAC/ELV dimming only at 120V |

## OTHER DATA

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Environmental location          | DAMP                                            |
| Junction box cover              | Included. For octagonal Junction box            |
| Junction box cover color        | Textured black. Other finishing, please consult |
| Junction box cover measurements | Ø5.51 in   Ø140 mm                              |
| Cord Length                     | 10 ft   3.05 m                                  |


## Awards



High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffusor covering the light source.



## DIMENSIONS

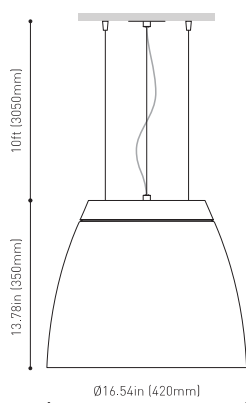

## Awards




## OTHER DATA

|                           |                                               |
|---------------------------|-----------------------------------------------|
| Fast adjustment tensioner | Yes                                           |
| Weight                    | 9.70 lb   4400 gr                             |
| Packaged weight           | 11.31 lb   5129.4 gr                          |
| Packaging dimensions      | 17.80 x 17.80 x 16.46 in   452 x 452 x 418 mm |
| Materials                 | Aluminium - Polymethyl Methacrylate           |




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffusor covering the light source.

POLAR DIAGRAM

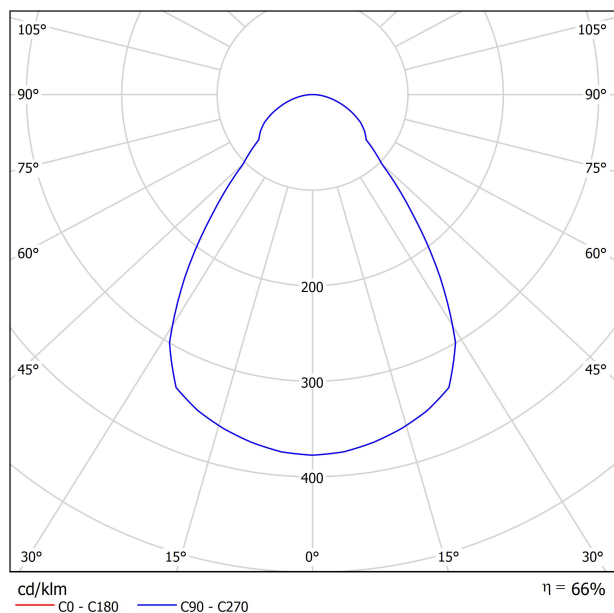

CONICAL DIAGRAM

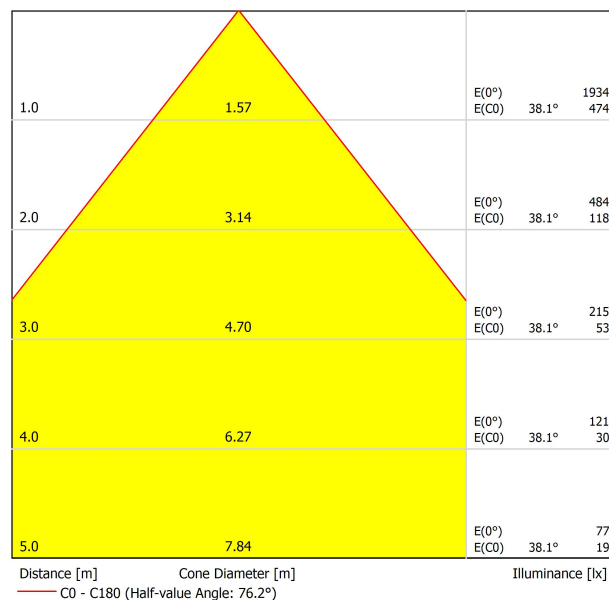

UGR

| Glare Evaluation According to UGR                                |     |                                                   |      |      |      |      |                                            |      |      |      |      |  |
|------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|--|
| $\rho$ Ceiling                                                   |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   |  |
| $\rho$ Walls                                                     |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   |  |
| $\rho$ Floor                                                     |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   |  |
| Room Size<br>X Y                                                 |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |  |
| 2H                                                               | 2H  | 15.6                                              | 16.6 | 15.8 | 16.8 | 17.0 | 15.6                                       | 16.6 | 15.8 | 16.8 | 17.0 |  |
|                                                                  | 3H  | 17.4                                              | 18.3 | 17.7 | 18.6 | 18.8 | 17.4                                       | 18.3 | 17.7 | 18.6 | 18.8 |  |
|                                                                  | 4H  | 18.0                                              | 18.9 | 18.4 | 19.2 | 19.5 | 18.0                                       | 18.9 | 18.4 | 19.2 | 19.5 |  |
|                                                                  | 6H  | 18.6                                              | 19.4 | 18.9 | 19.7 | 20.0 | 18.6                                       | 19.4 | 18.9 | 19.7 | 20.0 |  |
|                                                                  | 8H  | 18.8                                              | 19.5 | 19.1 | 19.9 | 20.2 | 18.8                                       | 19.5 | 19.1 | 19.9 | 20.2 |  |
|                                                                  | 12H | 18.9                                              | 19.6 | 19.2 | 20.0 | 20.3 | 18.9                                       | 19.6 | 19.2 | 20.0 | 20.3 |  |
| 4H                                                               | 2H  | 16.2                                              | 17.1 | 16.5 | 17.3 | 17.6 | 16.2                                       | 17.1 | 16.5 | 17.3 | 17.6 |  |
|                                                                  | 3H  | 18.2                                              | 18.9 | 18.6 | 19.3 | 19.6 | 18.2                                       | 18.9 | 18.6 | 19.3 | 19.6 |  |
|                                                                  | 4H  | 19.0                                              | 19.7 | 19.4 | 20.0 | 20.4 | 19.0                                       | 19.7 | 19.4 | 20.0 | 20.4 |  |
|                                                                  | 6H  | 19.7                                              | 20.2 | 20.1 | 20.6 | 21.0 | 19.7                                       | 20.2 | 20.1 | 20.6 | 21.0 |  |
|                                                                  | 8H  | 19.9                                              | 20.4 | 20.3 | 20.8 | 21.2 | 19.9                                       | 20.4 | 20.3 | 20.8 | 21.2 |  |
|                                                                  | 12H | 20.1                                              | 20.6 | 20.5 | 21.0 | 21.4 | 20.1                                       | 20.6 | 20.5 | 21.0 | 21.4 |  |
| 8H                                                               | 4H  | 19.3                                              | 19.8 | 19.7 | 20.2 | 20.6 | 19.3                                       | 19.8 | 19.7 | 20.2 | 20.6 |  |
|                                                                  | 6H  | 20.1                                              | 20.5 | 20.6 | 21.0 | 21.4 | 20.1                                       | 20.5 | 20.6 | 21.0 | 21.4 |  |
|                                                                  | 8H  | 20.4                                              | 20.8 | 20.9 | 21.3 | 21.7 | 20.4                                       | 20.8 | 20.9 | 21.3 | 21.7 |  |
|                                                                  | 12H | 20.7                                              | 21.0 | 21.2 | 21.5 | 22.0 | 20.7                                       | 21.0 | 21.2 | 21.5 | 22.0 |  |
| 12H                                                              | 4H  | 19.3                                              | 19.8 | 19.8 | 20.2 | 20.7 | 19.3                                       | 19.8 | 19.8 | 20.2 | 20.7 |  |
|                                                                  | 6H  | 20.2                                              | 20.6 | 20.7 | 21.0 | 21.5 | 20.2                                       | 20.6 | 20.7 | 21.0 | 21.5 |  |
|                                                                  | 8H  | 20.6                                              | 20.9 | 21.0 | 21.3 | 21.8 | 20.6                                       | 20.9 | 21.0 | 21.3 | 21.8 |  |
| Variation of the observer position for the luminaire distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |  |
| S = 1.0H                                                         |     | +0.3 / -0.3                                       |      |      |      |      | +0.3 / -0.3                                |      |      |      |      |  |
| S = 1.5H                                                         |     | +0.7 / -0.5                                       |      |      |      |      | +0.7 / -0.5                                |      |      |      |      |  |
| S = 2.0H                                                         |     | +1.3 / -0.8                                       |      |      |      |      | +1.3 / -0.8                                |      |      |      |      |  |
| Standard table                                                   |     | BK05                                              |      |      |      |      | BK05                                       |      |      |      |      |  |
| Correction Summand                                               |     | -4.1                                              |      |      |      |      | -4.1                                       |      |      |      |      |  |
| Corrected Glare Indices referring to 5125lm Total Luminous Flux  |     |                                                   |      |      |      |      |                                            |      |      |      |      |  |