




DIMENSIONS



Accessories

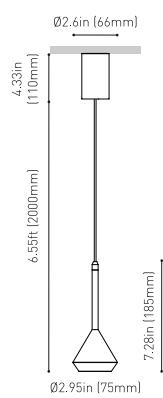

CORD ACCESSORY

Awards



PRODUCT

Name	SPIN BASE UL 2M 24° 4000K WT
Reference	U2210202WT
Color	Textured white
RAL	9016
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 5.6-33W 700mA
Reference	U100003602

LIGHT SOURCE

Type	LED
Gross luminous flux	680 Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	6.5 W
Current	700 mA
Efficacy	105 Lm/W
LED lifespan	L90B10>60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	86%
Delivered luminous flux	585 Lm
Light beam angle	24

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	8.8 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V


OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.



DIMENSIONS

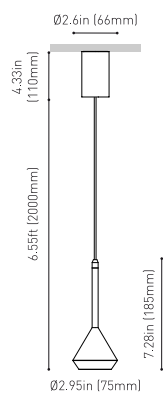

Accessories



CORD ACCESSORY

Awards




Cord Length	6.55 ft 2 m
Fast adjustment tensioner	No
Weight	1.356 lb 615 gr
Packaged weight	1.634 lb 741 gr
Packaging dimensions	15.16 x 4.06 x 3.07 in 385 x 103 x 78 mm
Materials	Aluminium - Polymethyl Methacrylate

OTHER DATA



Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

Mandatory / Not Included

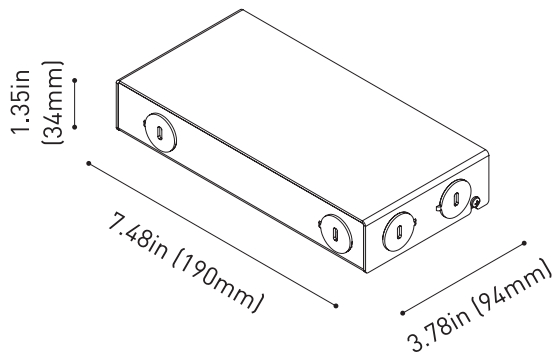

PRODUCT	
Model	REMOTE BOX 5.6-33W 700mA
Driver	Included
Reference	U100003602
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 3
LED - Driver Distance	Maximum suggested distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz


OUTPUT CHARACTERISTICS	
Output Voltage	8 - 47 V
Output Current	700 mA
Output Power	5.6 - 33 W






SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

CONICAL DIAGRAM

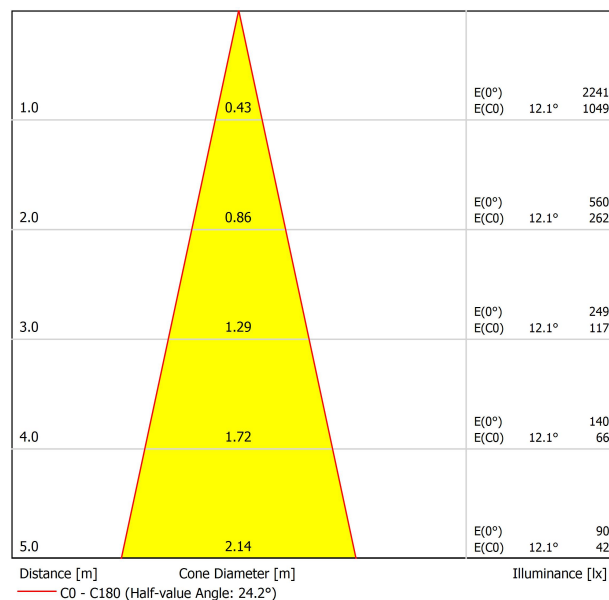

Glare Evaluation According to UGR

[illegible]

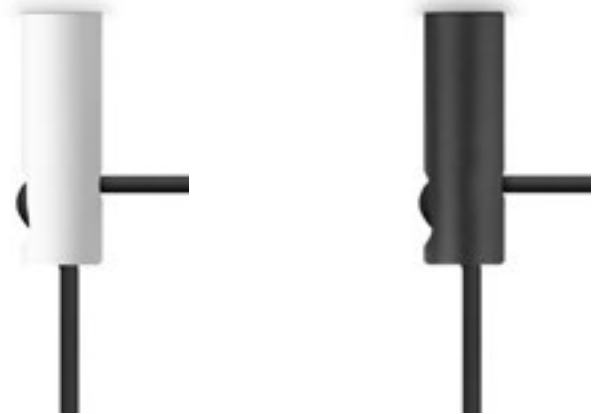

Model	Cord Accessory UL
Reference	U223-00-00 W N
Colour	W ☐ RAL 9016 N ☒ RAL9005
Category	Accessories

Dimmensional drawing

