




### DIMENSIONS



### Accessories

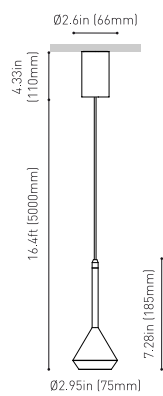

CORD ACCESSORY

### Awards



### PRODUCT

|                  |                              |
|------------------|------------------------------|
| <b>Name</b>      | SPIN BASE UL 5M 40° 2700K WT |
| <b>Reference</b> | U2212210WT                   |
| <b>Color</b>     | Textured white               |
| <b>RAL</b>       | 9016                         |
| <b>Category</b>  | SUSPENSION                   |

### MOUNTING ACCESSORY / DRIVER

|                                    |                                        |
|------------------------------------|----------------------------------------|
| <b>Mounting Accessory / Driver</b> | Mandatory, not included. See next page |
| <b>Model</b>                       | REMOTE BOX 5.6-33W 700mA               |
| <b>Reference</b>                   | U100003602                             |

### LIGHT SOURCE

|                              |                |
|------------------------------|----------------|
| <b>Type</b>                  | LED            |
| <b>Gross luminous flux</b>   | 600 Lm         |
| <b>Color temperature</b>     | 2700 K         |
| <b>Chromatic stability</b>   | MacAdam Step 2 |
| <b>Color Rendering Index</b> | CRI>90         |
| <b>Power</b>                 | 6.5 W          |
| <b>Current</b>               | 700 mA         |
| <b>Efficacy</b>              | 92 Lm/W        |
| <b>LED lifespan</b>          | L90B10>60.000h |

### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                                |        |
|--------------------------------|--------|
| <b>Lighting efficiency</b>     | 84%    |
| <b>Delivered luminous flux</b> | 504 Lm |
| <b>Light beam angle</b>        | 40     |

### LIGHTING FIXTURE | ELECTRICAL DATA

|                                   |           |
|-----------------------------------|-----------|
| <b>Power values of the system</b> | 8.8 W     |
| <b>Voltage</b>                    | 120-277 V |
| <b>Frequency</b>                  | 50/60 Hz  |
| <b>Dimming</b>                    | 0-10V     |


### OTHER DATA

|                               |      |
|-------------------------------|------|
| <b>IC Rated</b>               | Yes  |
| <b>Environmental location</b> | DAMP |

Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.



#### DIMENSIONS

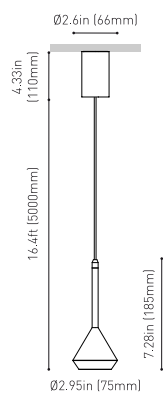

#### Accessories



CORD ACCESSORY

#### Awards




|                                  |                                            |
|----------------------------------|--------------------------------------------|
| <b>Cord Length</b>               | 16.4 ft   5 m                              |
| <b>Fast adjustment tensioner</b> | No                                         |
| <b>Weight</b>                    | 1.356 lb   615 gr                          |
| <b>Packaged weight</b>           | 1.634 lb   741 gr                          |
| <b>Packaging dimensions</b>      | 15.16 x 4.06 x 3.07 in   385 x 103 x 78 mm |
| <b>Materials</b>                 | Aluminium - Polymethyl Methacrylate        |

#### OTHER DATA



Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

Mandatory / Not Included

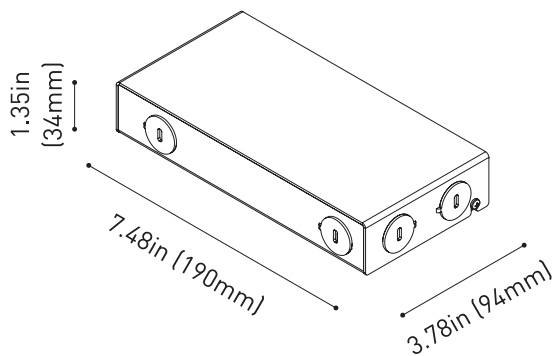


| PRODUCT               |                                           |
|-----------------------|-------------------------------------------|
| Model                 | REMOTE BOX 5.6-33W 700mA                  |
| Driver                | Included                                  |
| Reference             | U100003602                                |
| IC Rated              | Yes                                       |
| Dimming               | 0-10V                                     |
| Size                  | 7.48 x 3.78 x 1.35 in   190 x 94 x 34 mm  |
| Weight                | 1.8 lb   820 gr                           |
| Packaged weight       | 1.93 lb   875 gr                          |
| Packaging dimensions  | 9.53 x 4.13 x 1.54 in   242 x 105 x 39 mm |
| Nº Luminaires         | 1 to 3                                    |
| LED - Driver Distance | Maximum suggested distance is 16 feet     |

| INPUT CHARACTERISTICS |           |
|-----------------------|-----------|
| Input Voltage         | 120-277 V |
| Frequency             | 50/60 Hz  |


| OUTPUT CHARACTERISTICS |            |
|------------------------|------------|
| Output Voltage         | 8 - 47 V   |
| Output Current         | 700 mA     |
| Output Power           | 5.6 - 33 W |



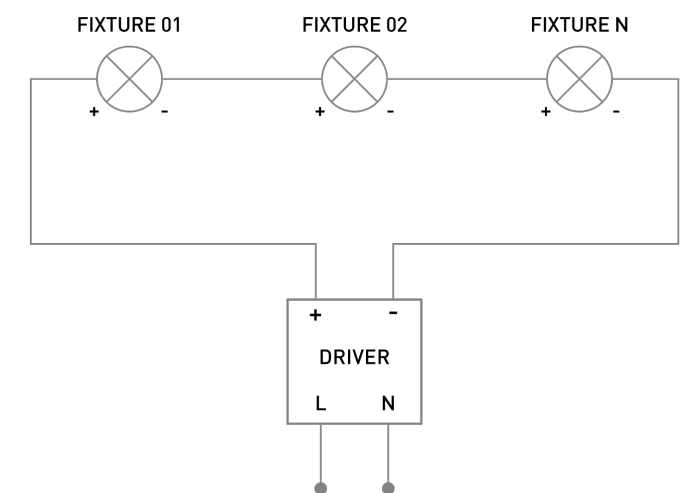


SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER  
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

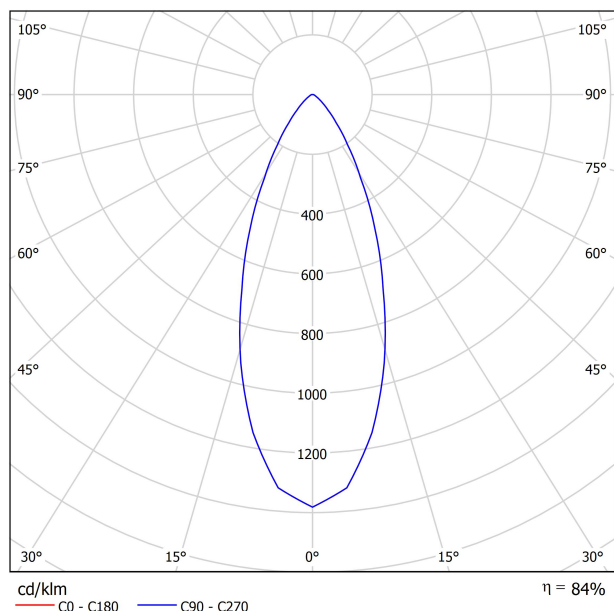


CONICAL DIAGRAM

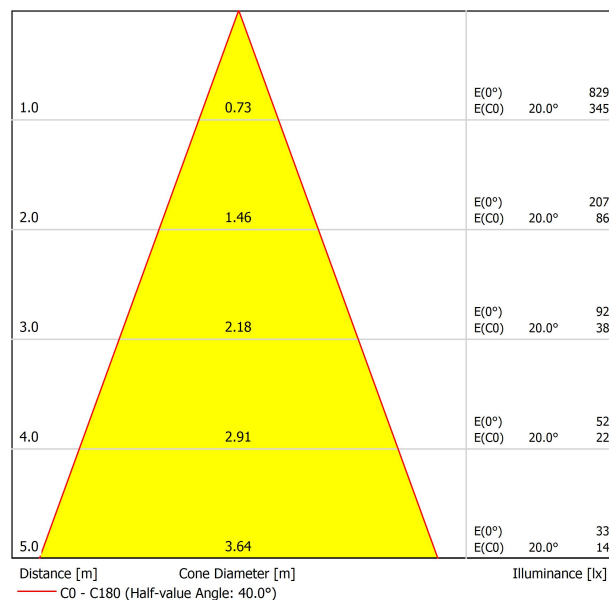

UGR

| Glare Evaluation According to UGR                                |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |
|------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|------|
| $\rho$ Ceiling                                                   |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30   |
| $\rho$ Walls                                                     |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   | 30   |
| $\rho$ Floor                                                     |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   | 20   |
| Room Size<br>X                  Y                                |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |      |
| 2H                                                               | 2H  | 19.3                                              | 20.1 | 19.6 | 20.3 | 20.5 | 19.3                                       | 20.1 | 19.6 | 20.3 | 20.5 | 20.5 |
|                                                                  | 3H  | 20.2                                              | 20.9 | 20.5 | 21.1 | 21.4 | 20.2                                       | 20.9 | 20.5 | 21.1 | 21.4 | 21.4 |
|                                                                  | 4H  | 20.7                                              | 21.3 | 21.0 | 21.6 | 21.8 | 20.7                                       | 21.3 | 21.0 | 21.6 | 21.8 | 21.8 |
|                                                                  | 6H  | 21.1                                              | 21.7 | 21.4 | 22.0 | 22.3 | 21.1                                       | 21.7 | 21.4 | 22.0 | 22.3 | 22.3 |
|                                                                  | 8H  | 21.3                                              | 21.9 | 21.7 | 22.2 | 22.5 | 21.3                                       | 21.9 | 21.7 | 22.2 | 22.5 | 22.5 |
|                                                                  | 12H | 21.6                                              | 22.2 | 22.0 | 22.5 | 22.8 | 21.6                                       | 22.2 | 22.0 | 22.5 | 22.8 | 22.8 |
| 4H                                                               | 2H  | 19.5                                              | 20.2 | 19.8 | 20.4 | 20.7 | 19.5                                       | 20.2 | 19.8 | 20.4 | 20.7 | 20.7 |
|                                                                  | 3H  | 20.7                                              | 21.2 | 21.0 | 21.5 | 21.8 | 20.7                                       | 21.2 | 21.0 | 21.5 | 21.8 | 21.8 |
|                                                                  | 4H  | 21.3                                              | 21.8 | 21.7 | 22.1 | 22.5 | 21.3                                       | 21.8 | 21.7 | 22.1 | 22.5 | 22.5 |
|                                                                  | 6H  | 21.9                                              | 22.3 | 22.3 | 22.7 | 23.1 | 21.9                                       | 22.3 | 22.3 | 22.7 | 23.1 | 23.1 |
|                                                                  | 8H  | 22.2                                              | 22.6 | 22.7 | 23.0 | 23.4 | 22.2                                       | 22.6 | 22.7 | 23.0 | 23.4 | 23.4 |
|                                                                  | 12H | 22.6                                              | 23.0 | 23.1 | 23.4 | 23.8 | 22.6                                       | 23.0 | 23.1 | 23.4 | 23.8 | 23.8 |
| 8H                                                               | 4H  | 21.5                                              | 21.9 | 21.9 | 22.3 | 22.7 | 21.5                                       | 21.9 | 21.9 | 22.3 | 22.7 | 22.7 |
|                                                                  | 6H  | 22.3                                              | 22.6 | 22.8 | 23.0 | 23.5 | 22.3                                       | 22.6 | 22.8 | 23.0 | 23.5 | 23.5 |
|                                                                  | 8H  | 22.8                                              | 23.0 | 23.2 | 23.5 | 23.9 | 22.8                                       | 23.0 | 23.2 | 23.5 | 23.9 | 23.9 |
|                                                                  | 12H | 23.4                                              | 23.6 | 23.8 | 24.0 | 24.5 | 23.4                                       | 23.6 | 23.8 | 24.0 | 24.5 | 24.5 |
| 12H                                                              | 4H  | 21.6                                              | 21.9 | 22.0 | 22.3 | 22.7 | 21.6                                       | 21.9 | 22.0 | 22.3 | 22.7 | 22.7 |
|                                                                  | 6H  | 22.4                                              | 22.6 | 22.9 | 23.1 | 23.5 | 22.4                                       | 22.6 | 22.9 | 23.1 | 23.5 | 23.5 |
|                                                                  | 8H  | 22.9                                              | 23.1 | 23.4 | 23.6 | 24.1 | 22.9                                       | 23.1 | 23.4 | 23.6 | 24.1 | 24.1 |
| Variation of the observer position for the luminaire distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |
| S = 1.0H<br>S = 1.5H<br>S = 2.0H                                 |     | +2.0 / -1.8<br>+4.0 / -2.5<br>+5.8 / -3.1         |      |      |      |      | +2.0 / -1.8<br>+4.0 / -2.5<br>+5.8 / -3.1  |      |      |      |      |      |
| Standard table                                                   |     | BK02                                              |      |      |      |      | BK02                                       |      |      |      |      |      |
| Correction<br>Summand                                            |     | 8.2                                               |      |      |      |      | 8.2                                        |      |      |      |      |      |
| Corrected Glare Indices referring to 600lm Total Luminous Flux   |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |

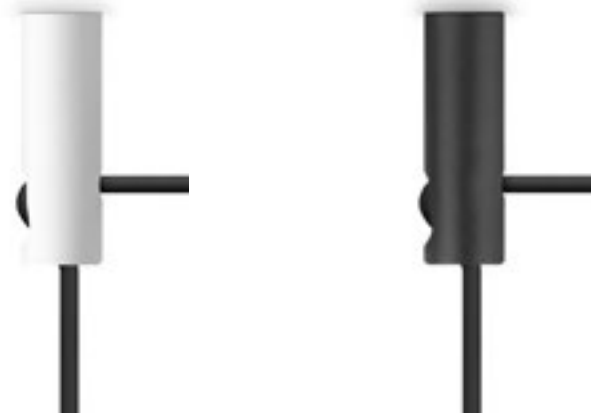

|           |                                                                                     |
|-----------|-------------------------------------------------------------------------------------|
| Model     | Cord Accessory UL                                                                   |
| Reference | U223-00-00   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL9005 |
| Category  | Accessories                                                                         |

Dimmensional drawing

