




DIMENSIONS



Accessories

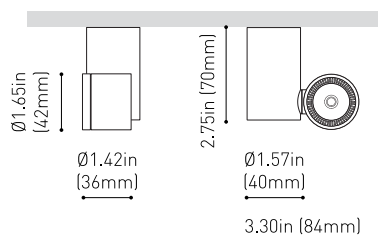

BEAM MIXER DIFFUSER



ANTI-GLARE HONEYCOMB LOUVER

Awards



PRODUCT

Name	IO SURFACE UL 30° 3000K NT
Reference	U2630121NT
Color	Textured black
RAL	9005
Category	SURFACE

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE

Type	LED
Gross luminous flux	505 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	4.5 W
Current	500 mA
Efficacy	112 Lm/W
LED lifespan	L90B10>55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	89%
Delivered luminous flux	449 Lm
Light beam angle	30

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	6 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Io is a LED spotlight miniaturised in a fixture that is so small that it fits on the palm of your hand. Designed for accent lighting applications, its small dimensions mean it can be fitted in display cabinets, shop windows and small places without generating an invasive presence on the scene.




OTHER DATA

Swivel angle	325°
Rotation angle	355°
Weight	0.286 lb 130 gr
Packaged weight	0.386 lb 175.2 gr
Packaging dimensions	4.56 x 4.09 x 2.08 in 116 x 104 x 53 mm
Materials	Aluminium - Polycarbonate



DIMENSIONS

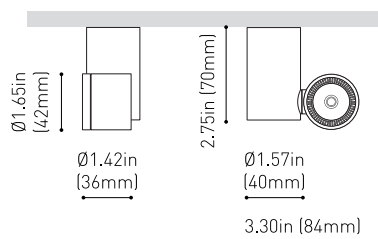

Accessories



BEAM MIXER DIFFUSER




ANTI-GLARE HONEYCOMB LOUVER

Awards



Io is a LED spotlight miniaturised in a fixture that is so small that it fits on the palm of your hand. Designed for accent lighting applications, its small dimensions mean it can be fitted in display cabinets, shop windows and small places without generating an invasive presence on the scene.

Mandatory / Not Included

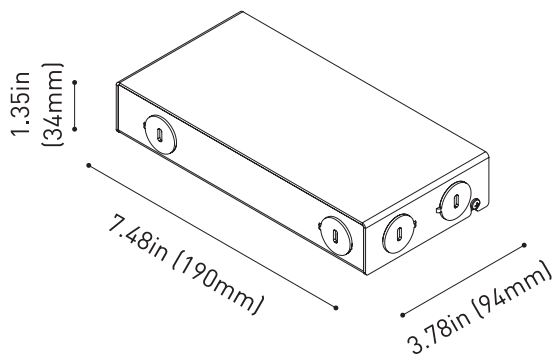


PRODUCT	
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 5
LED - Driver Distance	Maximum suggested distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz

OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W



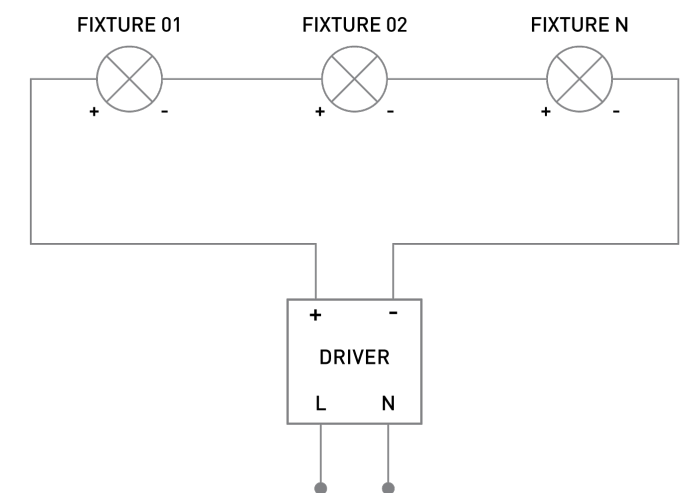

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

CONICAL DIAGRAM

Distance [m]	Cone Diameter [m]	$E(0^\circ)$ $E(C0)$	15.6°	$E(0^\circ)$ $E(C0)$	15.6°
1.0	0.56	1122	504		
2.0	1.12	281	126		
3.0	1.68	125	56		
4.0	2.23	70	31		
5.0	2.79	45	20		

Distance [m] Cone Diameter [m] Illuminance [lx]


— C0 - C180 (Half-value Angle: 31.2°)



	PRODUCT
Model	Beam Mixer Diffuser
Reference	0805-01-00
Category	Accessories
	NOT SOLD SEPARATELY AFFECTS THE LIGHTING PARAMETERS

The Beam Mixer Diffuser is used to smooth beam artifacts caused by parabolic, Fresnel, or TIR lens collimators without significant broadening.

The unique mixing design provides superior far-field smoothing and color mixing with high on-axis brightness. Compared with traditional diffusers, it maintains higher central beam candlepower (CBCP), and produce less undesirable "field light" at higher angles.



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	0806-00-00 WT NT
Colour	WT ☐ Textured white NT ☐ Textured black
Category	Accessories
	NOT SOLD SEPARATELY AFFECTS THE LIGHTING PARAMETERS



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.