




DIMENSIONS



Accessories

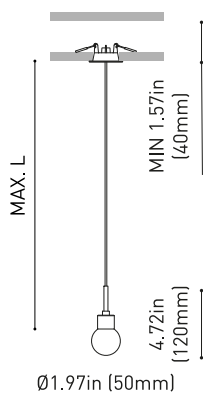

CORD ACCESSORY

Awards



reddot winner 2021
lighting design



PRODUCT

Name	ALASKA UL 2M 2700K BG
Reference	U4250010BG
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE

Type	LED
Gross luminous flux	475 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	4.5 W
Current	500 mA
Efficacy	105 Lm/W
LED lifespan	L90B10>55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	30%
Delivered luminous flux	143 Lm
Light beam angle	21°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	6.5 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.




Recess measurements	Ø1.97 in Ø50 mm
Cord Length	MAX. 6.55 ft MAX. 2 m
Fast adjustment tensioner	No
Weight	0.64 lb 290 gr
Packaged weight	0.90 lb 410 gr
Packaging dimensions	8.27 x 7.01 x 3.43 in 210 x 178 x 87 mm
Materials	Aluminium / Optical Glass

OTHER DATA



DIMENSIONS

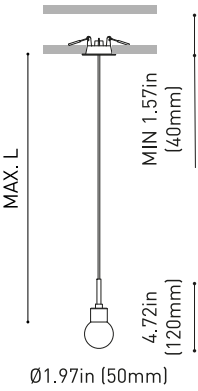

Accessories



CORD ACCESSORY

Awards




reddot winner 2021
lighting design



Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.

Mandatory / Not Included

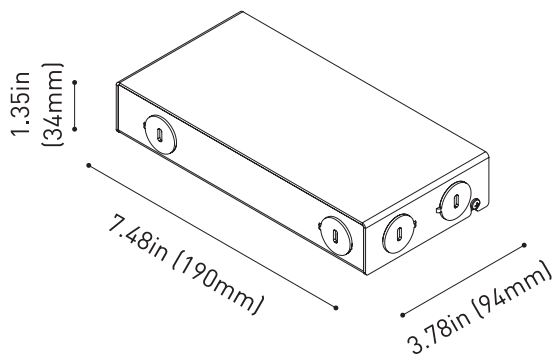

PRODUCT	
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 5
LED - Driver Distance	Maximum suggested remote mounting distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz


OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W







SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

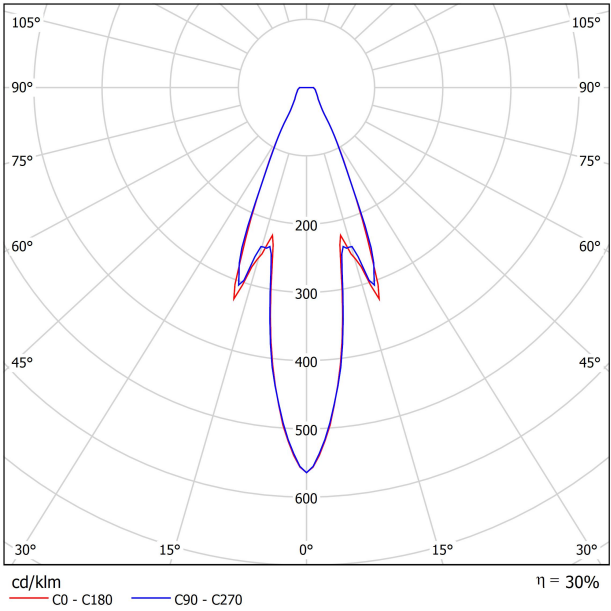

CONICAL DIAGRAM

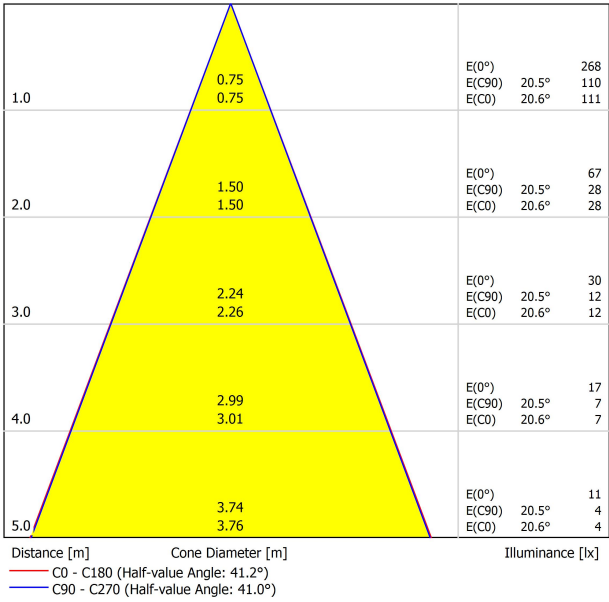

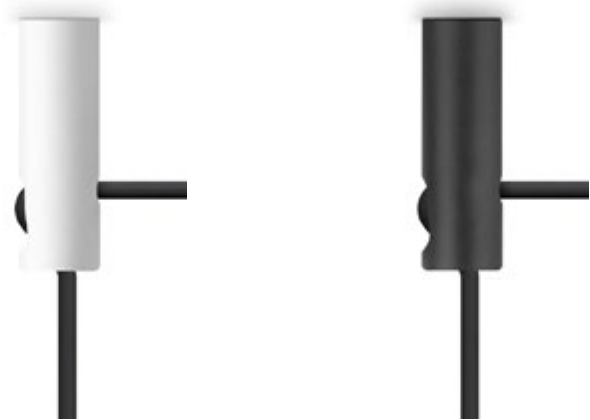

		PRODUCT
Model		Cord Accessory UL
Reference		U223-00-00 W N
Colour		W ☐ RAL 9016 N ☒ RAL9005
Category		Accessories

Dimmensional drawing

