




## DIMENSIONS



## Accessories

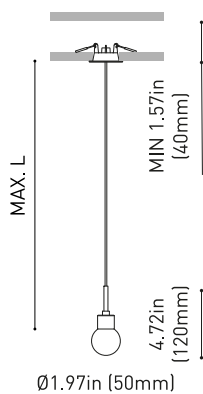

CORD ACCESSORY

## Awards



reddot winner 2021  
lighting design



## PRODUCT

|           |                      |
|-----------|----------------------|
| Name      | ALASKA UL 2M 2700K N |
| Reference | U4250010N            |
| Color     | Black                |
| RAL       | 9005                 |
| Category  | SUSPENSION           |

## MOUNTING ACCESSORY / DRIVER

|                             |                                        |
|-----------------------------|----------------------------------------|
| Mounting Accessory / Driver | Mandatory, not included. See next page |
| Model                       | REMOTE BOX 4-23W 500mA                 |
| Reference                   | U1000035                               |

## LIGHT SOURCE

|                       |                |
|-----------------------|----------------|
| Type                  | LED            |
| Gross luminous flux   | 475 Lm         |
| Color temperature     | 2700 K         |
| Chromatic stability   | MacAdam Step 2 |
| Color Rendering Index | CRI>90         |
| Power                 | 4.5 W          |
| Current               | 500 mA         |
| Efficacy              | 105 Lm/W       |
| LED lifespan          | L90B10>55.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                         |        |
|-------------------------|--------|
| Lighting efficiency     | 30%    |
| Delivered luminous flux | 143 Lm |
| Light beam angle        | 21°    |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                            |           |
|----------------------------|-----------|
| Power values of the system | 6.5 W     |
| Voltage                    | 120-277 V |
| Frequency                  | 50/60 Hz  |
| Dimming                    | 0-10V     |

## OTHER DATA

|                        |      |
|------------------------|------|
| IC Rated               | Yes  |
| Environmental location | DAMP |

Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.




|                           |                                           |
|---------------------------|-------------------------------------------|
| Recess measurements       | Ø1.97 in   Ø50 mm                         |
| Cord Length               | MAX. 6.55 ft   MAX. 2 m                   |
| Fast adjustment tensioner | No                                        |
| Weight                    | 0.64 lb   290 gr                          |
| Packaged weight           | 0.90 lb   410 gr                          |
| Packaging dimensions      | 8.27 x 7.01 x 3.43 in   210 x 178 x 87 mm |
| Materials                 | Aluminium / Optical Glass                 |

OTHER DATA



DIMENSIONS

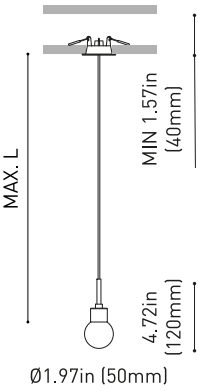

Accessories



CORD ACCESSORY

Awards




reddot winner 2021  
lighting design



Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.



Mandatory / Not Included

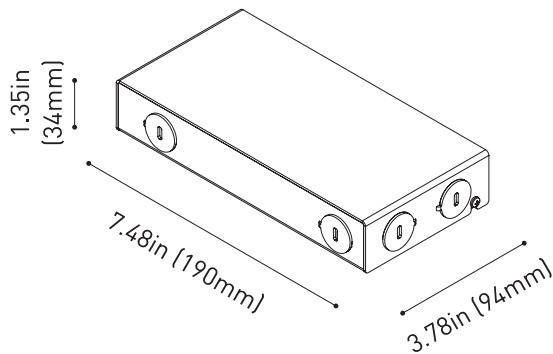


| PRODUCT               |                                                       |
|-----------------------|-------------------------------------------------------|
| Model                 | REMOTE BOX 4-23W 500mA                                |
| Driver                | Included                                              |
| Reference             | U1000035                                              |
| IC Rated              | Yes                                                   |
| Dimming               | 0-10V                                                 |
| Size                  | 7.48 x 3.78 x 1.35 in   190 x 94 x 34 mm              |
| Weight                | 1.8 lb   820 gr                                       |
| Packaged weight       | 1.93 lb   875 gr                                      |
| Packaging dimensions  | 9.53 x 4.13 x 1.54 in   242 x 105 x 39 mm             |
| Nº Luminaires         | 1 to 5                                                |
| LED - Driver Distance | Maximum suggested remote mounting distance is 16 feet |

| INPUT CHARACTERISTICS |           |
|-----------------------|-----------|
| Input Voltage         | 120-277 V |
| Frequency             | 50/60 Hz  |


| OUTPUT CHARACTERISTICS |          |
|------------------------|----------|
| Output Voltage         | 8 - 46 V |
| Output Current         | 500 mA   |
| Output Power           | 4 - 23 W |



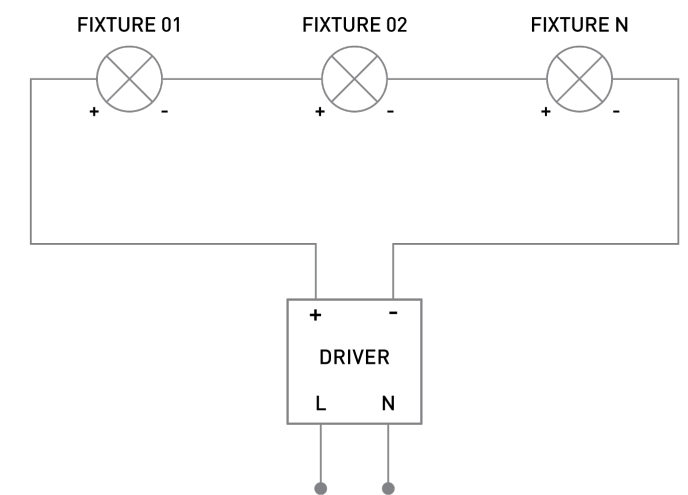



SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER  
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

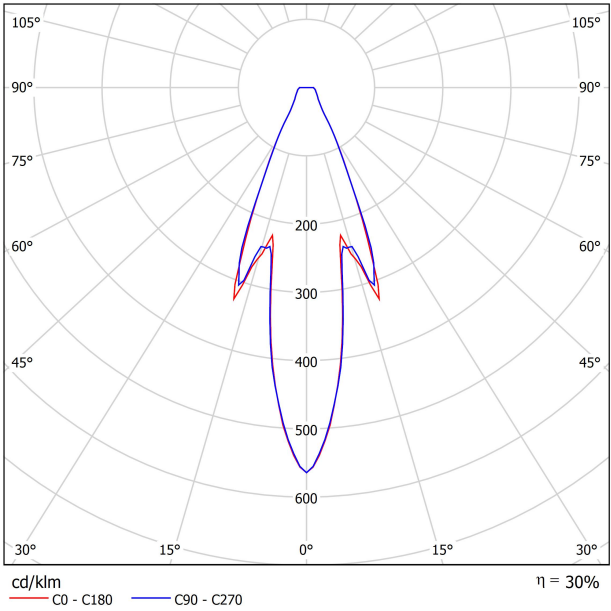

CONICAL DIAGRAM

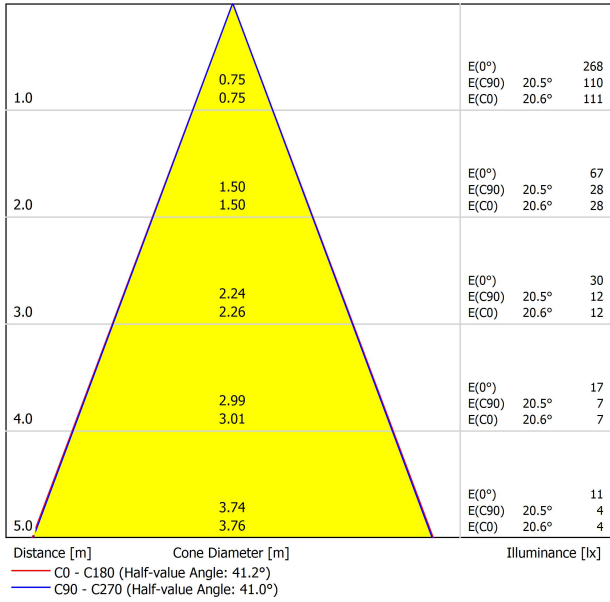

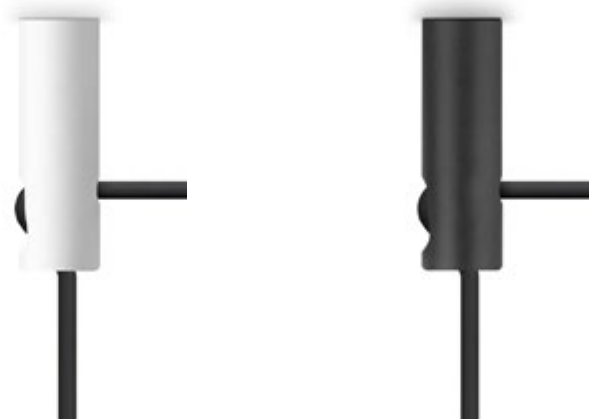

|           |  |                                                                                     |
|-----------|--|-------------------------------------------------------------------------------------|
|           |  | PRODUCT                                                                             |
| Model     |  | Cord Accessory UL                                                                   |
| Reference |  | U223-00-00   W   N                                                                  |
| Colour    |  | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL9005 |
| Category  |  | Accessories                                                                         |

Dimmensional drawing

