




DIMENSIONS



Awards

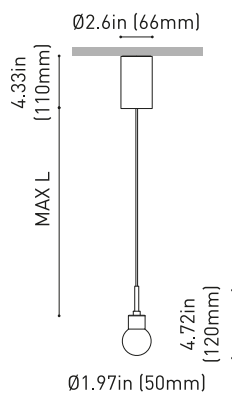

reddot winner 2021
lighting design



Bronze Delta
ADI Awards 2022



NEW YORK
PRODUCT DESIGN
AWARDS
2022

PRODUCT

Name	ALASKA BASE UL 5M 3000K N
Reference	U4252111N
Color	Black
RAL	9005
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE

Type	LED
Gross luminous flux	500 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	4.5 W
Current	500 mA
Efficacy	111 Lm/W
LED lifespan	L90B10>55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	30%
Delivered luminous flux	150 Lm
Light beam angle	21°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	6.5 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.




Cord Length	MAX. 16.4 ft MAX. 5 m
Fast adjustment tensioner	No
Weight	1.16 lb 524 gr
Packaged weight	1.36 lb 619 gr
Packaging dimensions	6.97 x 6.42 x 3.15 in 177 x 163 x 80 mm
Materials	Aluminium / Optical Glass

OTHER DATA



DIMENSIONS

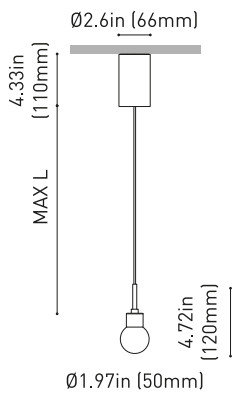

Awards




reddot winner 2021
lighting design



Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.



Mandatory / Not Included

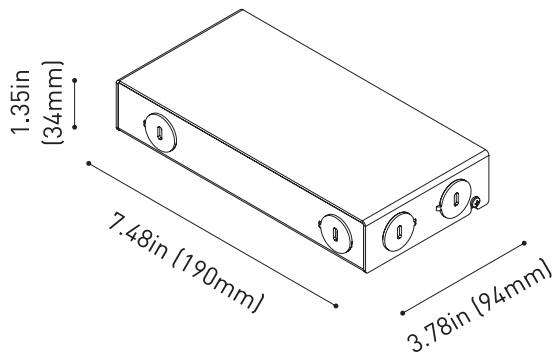

PRODUCT	
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 5
LED - Driver Distance	Maximum suggested remote mounting distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz


OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W





SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

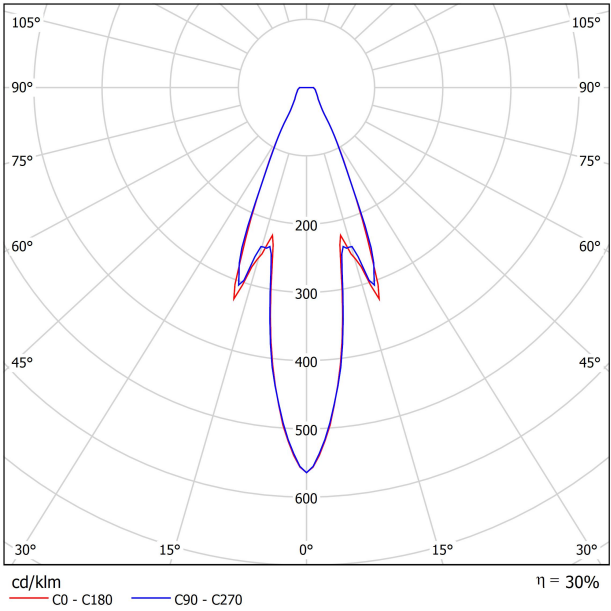

CONICAL DIAGRAM

