



## DIMENSIONS



## PRODUCT

|           |                                 |
|-----------|---------------------------------|
| Name      | LOOP 1300 UL 3M 2700K BG        |
| Reference | U4731100BG                      |
| Color     | Brushed Gold                    |
| RAL       | Paint of metallic nanoparticles |
| Category  | SUSPENSION                      |

## MOUNTING ACCESSORY / DRIVER

|                             |                                        |
|-----------------------------|----------------------------------------|
| Mounting Accessory / Driver | Mandatory, not included. See next page |
| Model                       | REMOTE BOX 19.6-26.4W 700mA            |
| Reference                   | U1000137                               |

## LIGHT SOURCE

|                       |                |
|-----------------------|----------------|
| Type                  | LED            |
| Gross luminous flux   | 2900 Lm        |
| Color temperature     | 2700 K         |
| Chromatic stability   | MacAdam Step 3 |
| Color Rendering Index | CRI>95         |
| Power                 | 24.6 W         |
| Current               | 700 mA         |
| Efficacy              | 118 Lm/W       |
| LED lifespan          | L90B10>50.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                         |         |
|-------------------------|---------|
| Lighting efficiency     | 38%     |
| Delivered luminous flux | 1102 Lm |
| Light beam angle        | 110°    |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                            |           |
|----------------------------|-----------|
| Power values of the system | 28.1 W    |
| Voltage                    | 120-277 V |
| Frequency                  | 50/60 Hz  |
| Dimming                    | 0-10V     |

## OTHER DATA

|                        |      |
|------------------------|------|
| IC Rated               | Yes  |
| Environmental location | DAMP |

## Awards



reddot winner 2023  
lighting design

archiproducts  
AWARDS  
WINNER

light  
MIDDLE EAST  
AWARDS  
2025

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.



|                           |                                                 |
|---------------------------|-------------------------------------------------|
| Recess measurements       | Ø2.44 in   Ø62 mm                               |
| Cord Length               | MAX. 9.84 ft   MAX. 3 m                         |
| Fast adjustment tensioner | No                                              |
| Weight                    | 6.59 lb   2987 gr                               |
| Packaged weight           | 10.99 lb   4987 gr                              |
| Packaging dimensions      | Ø5 x 64.76 in   Ø127 x 1645 mm                  |
| Materials                 | Optical glass / Optical Polymethyl Methacrylate |

OTHER DATA



DIMENSIONS



Awards




reddot winner 2023  
lighting design

archiproducts  
AWARDS  
WINNER

light  
MIDDLE EAST  
AWARDS  
2025

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.

Mandatory / Not Included

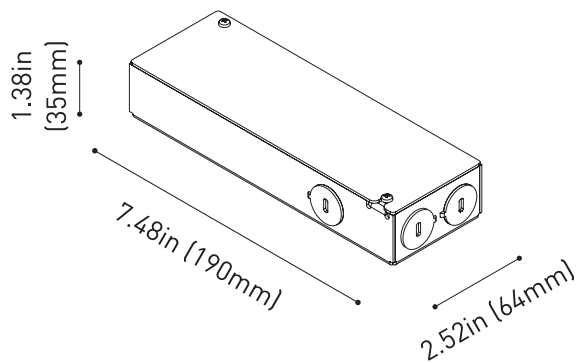

| PRODUCT               |                                                       |
|-----------------------|-------------------------------------------------------|
| Model                 | REMOTE BOX 19.6-26.4W 700mA                           |
| Driver                | Included                                              |
| Reference             | U1000137                                              |
| IC Rated              | Yes                                                   |
| Dimming               | 0-10V                                                 |
| Size                  | 7.48 x 2.52 x 1.38 in   190 x 64 x 35 mm              |
| Weight                | 1.59 lb   720 gr                                      |
| Packaged weight       | 1.93 lb   875 gr                                      |
| Packaging dimensions  | 11.26 x 2.91 x 1.77 in   286 x 74 x 45 mm             |
| Nº Luminares          | 1                                                     |
| LED - Driver Distance | Maximum suggested remote mounting distance is 24 feet |

| INPUT CHARACTERISTICS |           |
|-----------------------|-----------|
| Input Voltage         | 120-277 V |
| Frequency             | 50/60 Hz  |


| OUTPUT CHARACTERISTICS |               |
|------------------------|---------------|
| Output Voltage         | 28 - 42 V     |
| Output Current         | 700 mA        |
| Output Power           | 19.6 - 26.4 W |





SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER  
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

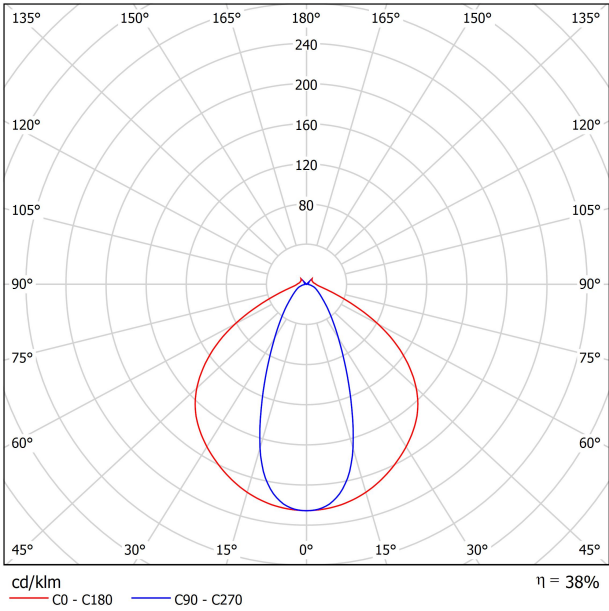

CONICAL DIAGRAM

