




DIMENSIONS

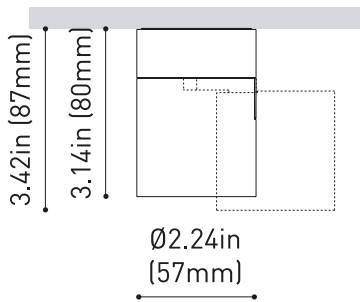

PRODUCT

Name	FLIP SURFACE UL FLOOD 3000K WTW
Reference	U4900021WTW
Color	Textured white
RAL	9016
Category	SURFACE

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE

Type	LED
Gross luminous flux	650 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	6 W
Current	500 mA
Efficacy	108 Lm/W
LED lifespan	L80B10>60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	78%
Delivered luminous flux	507 Lm
Light beam angle	34°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	8.2 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Flip is pure form and movement. Its adjustable and tilting and design imbues versatility and enables this product to bathe light wherever it is desired.




Swivel angle	90°
Rotation angle	350°
Weight	0.463 lb 210 gr
Packaged weight	0.573 lb 260 gr
Packaging dimensions	3.78 x 3.58 x 4.06 in 96 x 91 x 103 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




DIMENSIONS

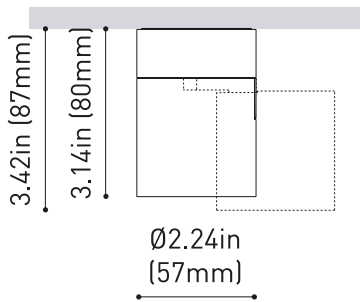

Flip is pure form and movement. Its adjustable and tilting and design imbues versatility and enables this product to bathe light wherever it is desired.

Mandatory / Not Included

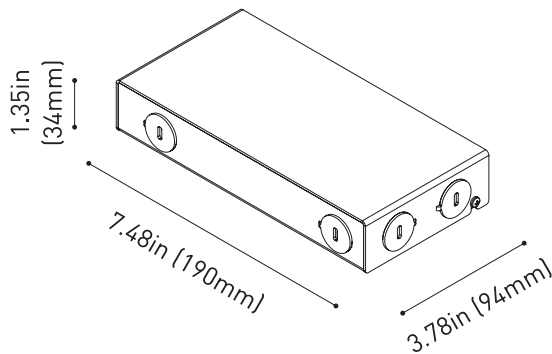


PRODUCT	
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 4
LED - Driver Distance	Maximum suggested distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz

OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W



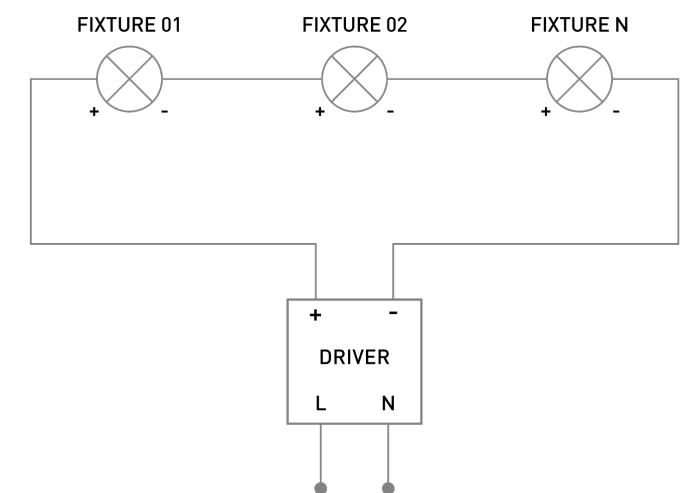

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER