




## DIMENSIONS



## PRODUCT

|           |                                  |
|-----------|----------------------------------|
| Name      | FLIP RECESSED UL SPOT 2700K NTMG |
| Reference | U4910010NTMG                     |
| Color     | Textured black-Metallized gold   |
| RAL       | Metallic finish                  |
| Category  | CEILING RECESSED                 |

## MOUNTING ACCESSORY / DRIVER

|                             |                                        |
|-----------------------------|----------------------------------------|
| Mounting Accessory / Driver | Mandatory, not included. See next page |
| Model                       | REMOTE BOX 4-23W 500mA                 |
| Reference                   | U1000035                               |

## LIGHT SOURCE

|                       |                |
|-----------------------|----------------|
| Type                  | LED            |
| Gross luminous flux   | 620 Lm         |
| Color temperature     | 2700 K         |
| Chromatic stability   | MacAdam Step 2 |
| Color Rendering Index | CRI>90         |
| Power                 | 6 W            |
| Current               | 500 mA         |
| Efficacy              | 103 Lm/W       |
| LED lifespan          | L80B10>60.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                         |        |
|-------------------------|--------|
| Lighting efficiency     | 86%    |
| Delivered luminous flux | 533 Lm |
| Light beam angle        | 23°    |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                            |           |
|----------------------------|-----------|
| Power values of the system | 8.2 W     |
| Voltage                    | 120-277 V |
| Frequency                  | 50/60 Hz  |
| Dimming                    | 0-10V     |

## OTHER DATA

|                        |      |
|------------------------|------|
| IC Rated               | Yes  |
| Environmental location | DAMP |

Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

# Flip Recessed

ARKOSLIGHT




|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Recess measurements  | Ø2.44 in   Ø62 mm                                           |
| Swivel angle         | 90°                                                         |
| Rotation angle       | 350°                                                        |
| Weight               | 0.518 lb   235 gr                                           |
| Packaged weight      | 0.706 lb   320 gr                                           |
| Packaging dimensions | 8.07 x 4.72 x 3.78 in   205 x 120 x 96 mm                   |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

### OTHER DATA




### DIMENSIONS



Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Mandatory / Not Included

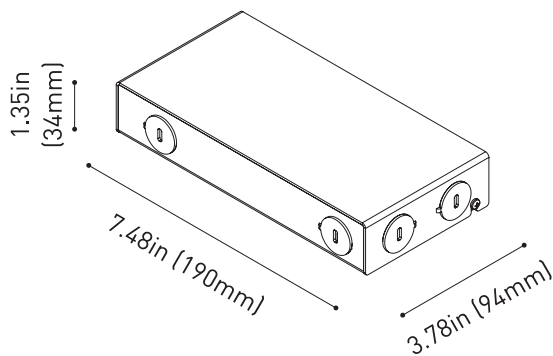


| PRODUCT               |                                           |
|-----------------------|-------------------------------------------|
| Model                 | REMOTE BOX 4-23W 500mA                    |
| Driver                | Included                                  |
| Reference             | U1000035                                  |
| IC Rated              | Yes                                       |
| Dimming               | 0-10V                                     |
| Size                  | 7.48 x 3.78 x 1.35 in   190 x 94 x 34 mm  |
| Weight                | 1.8 lb   820 gr                           |
| Packaged weight       | 1.93 lb   875 gr                          |
| Packaging dimensions  | 9.53 x 4.13 x 1.54 in   242 x 105 x 39 mm |
| Nº Luminaires         | 1 to 4                                    |
| LED - Driver Distance | Maximum suggested distance is 16 feet     |

| INPUT CHARACTERISTICS |           |
|-----------------------|-----------|
| Input Voltage         | 120-277 V |
| Frequency             | 50/60 Hz  |

| OUTPUT CHARACTERISTICS |          |
|------------------------|----------|
| Output Voltage         | 8 - 46 V |
| Output Current         | 500 mA   |
| Output Power           | 4 - 23 W |



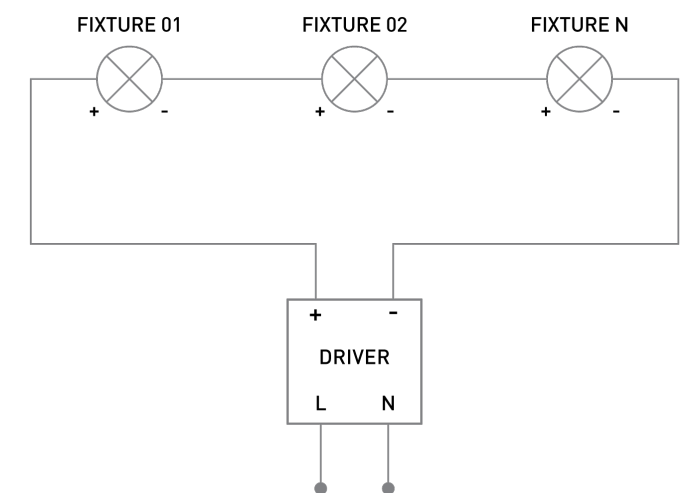

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER  
RESPECT THE DISTANCE LED - DRIVER