


Flip Recessed

ARKOSLIGHT



DIMENSIONS



PRODUCT

Name	FLIP RECESSED UL FLOOD 2700K NT
Reference	U4910020NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE

Type	LED
Gross luminous flux	620 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	6 W
Current	500 mA
Efficacy	103 Lm/W
LED lifespan	L80B10>60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	78%
Delivered luminous flux	484 Lm
Light beam angle	34°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	8.2 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Flip Recessed

ARKOSLIGHT




Recess measurements	Ø2.44 in Ø62 mm
Swivel angle	90°
Rotation angle	350°
Weight	0.518 lb 235 gr
Packaged weight	0.706 lb 320 gr
Packaging dimensions	8.07 x 4.72 x 3.78 in 205 x 120 x 96 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




DIMENSIONS



Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Mandatory / Not Included

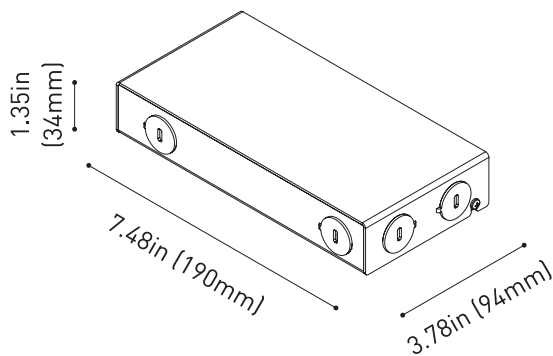


PRODUCT	
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 4
LED - Driver Distance	Maximum suggested distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz

OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W



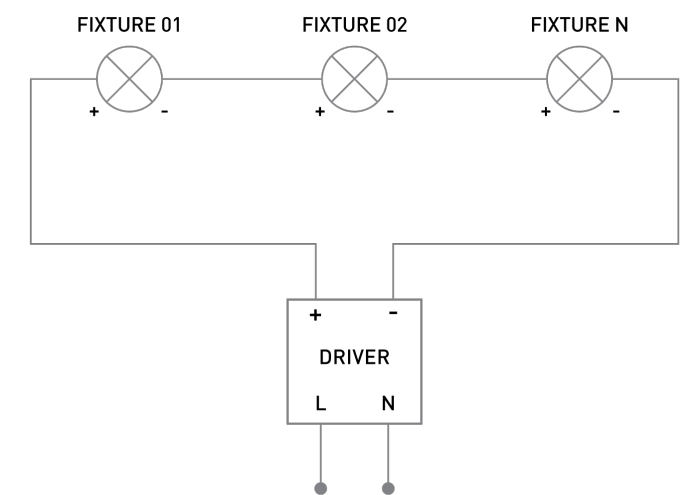

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER