




DIMENSIONS



Awards

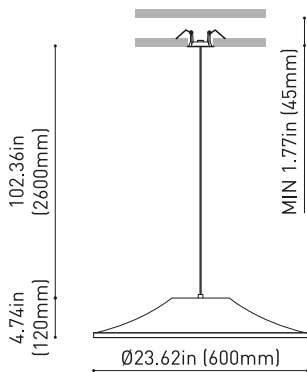

Name	WARP 600 UL 2700K NT
Reference	U5330010NT
Color	Textured black
RAL	9005
Category	SUSPENSION

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 1.2-7.4W 150mA
Reference	U1000134

Type	LED
Gross luminous flux	800 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	5 W
Current	150 mA
Efficacy	160 Lm/W
LED lifespan	L90B10>60.000h

Lighting efficiency	54%
Delivered luminous flux	432 Lm
Light beam angle	85°

Power values of the system	6.6 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

IC Rated	Yes
Environmental location	DAMP

PRODUCT

MOUNTING ACCESSORY / DRIVER

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA

LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA

Warp emerges from a circumference of the horizontal plane and takes shape with true fluidity. Thanks to a translucent and elastic material such as textile, this suspension luminaire plays with the effects of translucency, offering great visual lightness and filtering the light through a defined contour. Warp has been designed by the German studio Geckeler Michels.




Recess measurements	Ø2.44 in Ø62 mm
Cord Length	102.36 2600
Fast adjustment tensioner	No
Weight	3.09 lb 1405 gr
Packaged weight	7.89 lb 3580 gr
Packaging dimensions	30.31 x 31.10 x 3.93 in 770 x 790 x 100 mm
Materials	Aluminium / Polyamide / Polymethyl Methacrylate

OTHER DATA



DIMENSIONS

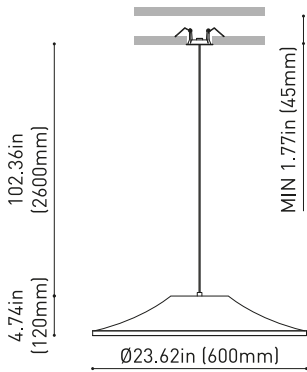


Awards



Warp emerges from a circumference of the horizontal plane and takes shape with true fluidity. Thanks to a translucent and elastic material such as textile, this suspension luminaire plays with the effects of translucency, offering great visual lightness and filtering the light through a defined contour. Warp has been designed by the German studio Geckeler Michels.

Mandatory / Not Included

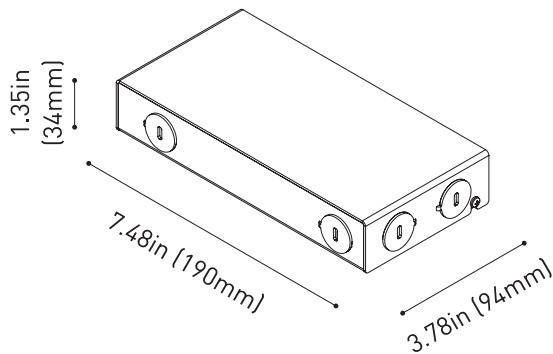


PRODUCT	
Model	REMOTE BOX 1.2-7.4W 150mA
Driver	Included
Reference	U1000134
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.8 lb 820 gr
Packaged weight	1.93 lb 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1
LED - Driver Distance	Maximum suggested remote mounting distance is 16 feet

INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz

OUTPUT CHARACTERISTICS	
Output Voltage	8 - 46 V
Output Current	150 mA
Output Power	1.2 - 7.4 W



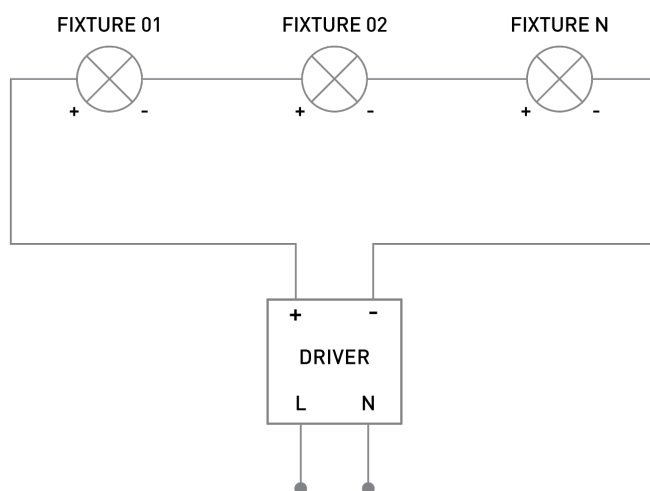

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

