




DIMENSIONS



Accessories

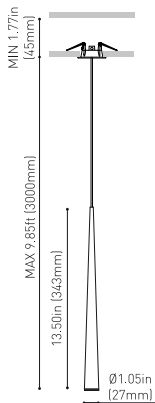

CORD ACCESSORY

PRODUCT

Name	HOLLY UL 3M 38° 3000K NT
Reference	U2811011NT
Color	Textured black
RAL	9005
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER

Mounting Accessory / Driver	Mandatory, not included. See next page
Model	REMOTE BOX 1.4-17W 700mA
Reference	U100003601

LIGHT SOURCE

Type	LED
Gross luminous flux	210 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>90
Power	2.1 W
Current	700 mA
Efficacy	100 Lm/W
LED lifespan	L90B10>102.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	92%
Delivered luminous flux	193 Lm
Light beam angle	19°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	3.8 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA

IC Rated	Yes
Environmental location	DAMP

HOLLY is a suspension luminaire for accent lighting applications. With a machined aluminium body and a simple yet elegant design HOLLY is made to the highest standards and it's a perfect fit for a decorative installation. Holly is designed to optimize the light beam and to obtain an elevated illuminance in the area where installed.




Recess measurements	Ø1.97 in Ø50 mm
Cord Length	9.85 ft 3 m
Fast adjustment tensioner	No
Weight	0.575 lb 261 gr
Packaged weight	0.86 lb 390 gr
Packaging dimensions	15.16 x 4.06 x 3.07 in 385 x 103 x 78 mm
Materials	Aluminium - Acrylonitrile Butadiene Styrene

OTHER DATA



DIMENSIONS

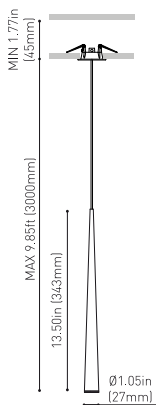


Accessories



CORD ACCESSORY


HOLLY is a suspension luminaire for accent lighting applications. With a machined aluminium body and a simple yet elegant design HOLLY is made to the highest standards and it's a perfect fit for a decorative installation. Holly is designed to optimize the light beam and to obtain an elevated illuminance in the area where installed.

Mandatory / Not Included

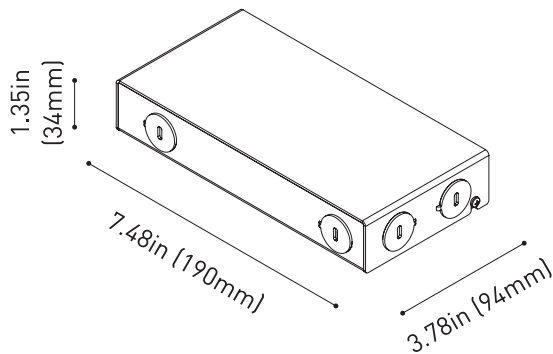


PRODUCT	
Model	REMOTE BOX 1.4-17W 700mA
Driver	Included
Reference	U100003601
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in 190 x 94 x 34 mm
Weight	1.9 lb 860 gr
Packaged weight	2.02 lb 865 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in 242 x 105 x 39 mm
Nº Luminaires	1 to 3
LED - Driver Distance	20AWG - 46ft
	19AWG - 59ft
	18AWG - 72ft
	17AWG - 92ft
	16AWG - 118ft
INPUT CHARACTERISTICS	
Input Voltage	120-277 V
Frequency	50/60 Hz
OUTPUT CHARACTERISTICS	
Output Voltage	2 - 24 V
Output Current	700 mA
Output Power	1.4 - 17 W



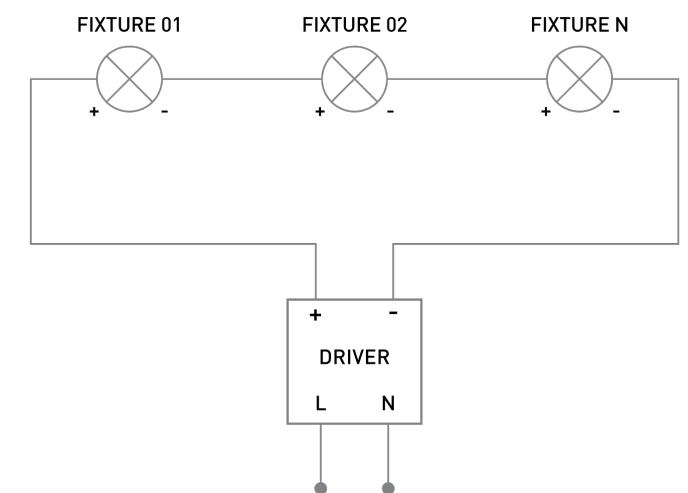



SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

POLAR DIAGRAM

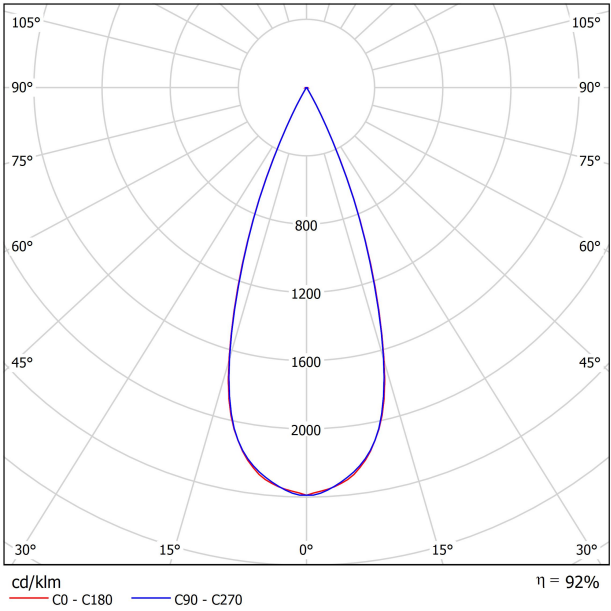

CONICAL DIAGRAM

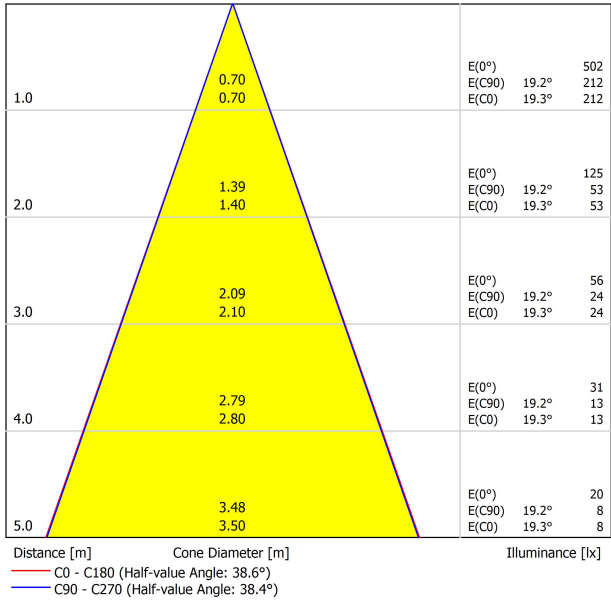

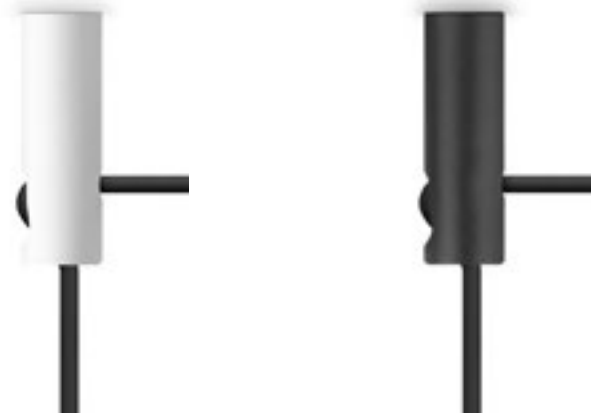

Model	Cord Accessory UL
Reference	U223-00-00 W N
Colour	W ☐ RAL 9016 N ☒ RAL9005
Category	Accessories

Dimmensional drawing

